

PLM2-N Spec-sheet



NB IoT – Cat-M1 Operated Low Power Level Transmitter With Narrow Sensor Head for Liquid Media

- Compatible with most standard communication Protocols (UDP, LwM2M, MQTT, NIDD, etc.)
- Wide range of industrial applications
- High accuracy
- Designed to meet outdoor applications
- Long-term durable performance in harsh environment
- Ultra-low power
- Suitable for liquids compatible with SS



TECHNICAL SPECIFICATION

Sensor

• Range:	1, 2, 3, 5, 10 (or other ranges up to 200)	m H ₂ O
• Accuracy:	±0.25 (typ.)	%Span
• Resolution:	±0.01	%Span
• Pressure reference:	Vented Gauge	
• Temperature Coefficient of Zero:	≤±0.03	%FS/°C
• Temperature Coefficient of Span:	≤±0.03	%FS/°C
• Long term stability (1 year):	≤ 0.2	%Span
• Overload Protection:	150	%FS
• Load Cycles (Zero to Full Scale):	10+	Million
• Storage / Operation Temperature:	-20 ~ +85	°C
• Compensated temperature:	0 ~ 60	°C

Power

• Power Supply:	Built-in Replaceable Lithium Battery, External Power (option)
• Rated Voltage	3.6
• Battery Lifetime:	50,000+ Readings and 10,000+ Transmission (with UDP protocol/ more than 10 years for most of applications)

Physical Specification

• Materials:	O-ring: Viton, Body: SS304, Diaphragm: SS316, Oil: Silicon, Enclosure: ASA/POM
• Process Connection:	No Process Connection (or on request)
• Weight:	~1,300 (for 3m range)
• Protection Rate:	g IP66 and UV protected enclosure and IP68 sensor head

Communication

• SIM Card Type	4FF Nano-SIM, from any Network Provider
• Firmware Update:	Over The Air, Locally via Wireless Connectivity
• Sampling Period:	Configurable via downlink (default 4 hours)
• Power Consumption:	Power Saving: < 5uA, Transmission: < 220mA

PLM2-N Spec-sheet



• Communication Standards	Cat-NB1 (NB-IoT) Cat-M1 (option of back support by GPRS)
• Communication Bands	B1/B2/B3/B4/B5/B8/B12/B13/B18/B19/B20/B26/B28 and B39
• Data Rates:	Cat-M1: 375Kbps (DL)/375Kbps (UL) NB-IoT: 32Kbps (DL)/70Kbps (UL)
• TX Power:	23dBm
• Min Receiver Sensitivity:	Cat-M1: -107dBm NB-IoT: -113dBm
• Antenna:	Internal (Default)/ External (customised options available)
• Optional Features:	<ul style="list-style-type: none">• Attach without PDN (Packet Data Network)• Support for IPV6• SMS communication• Mobility support (Cat-M1 only)

NETWORK CONNECTION AND VISUALISATION

Network Integration

Pre-configured or configurable to all main narrow band networks (3, A1, AT&T, China Mobile, DU, Etisalat, KPN, M1 Singapore, Optus, Orange, Proximus, Spark, Sprint, Swisscom, Telefonica, Telstra, T-Mobile, Verizon, Vodafone, 1NCE, Emnify and any other network)

Visualisation and Data Management

Ellenex white label microservice platform and Integratable to all main IIoT platforms directly or through the API(AWS, Azure, PTC ThingWorx, Bosch IoT, Cisco Jasper & Kinetic, Sierra Numerex, MathWorks ThingSpeak, GE Digital Predix, LandisGyr, Siemens MindSphere, Cumulocity, myDevices, Ubidots, TagoIO, AllThingsTalk Maker, HPE IoT and any other major IoT platform).

Ellenex Platform Main Features

- Encrypted ultra-low power communication protocol
- Advanced device inventory
- Integration APIs for enterprise systems
- Multi-tenant role-based access control
- Data export and import
- White-label platform for enterprise runs on private account
- Variable alarm setting for high and low thresholds and multi-channel alerting
- Sampling and transmission interval configuration
- Transmission condition configuration
- Other configurations and customisation available on request



Encrypted &
ultra-low power



Integratable



Dynamic
alerting



Multi-tenant



Scalable



Composable&
API first

PLM2-N Spec-sheet




MODEL GUIDE

Model Options

Sensor head options

S: standard size

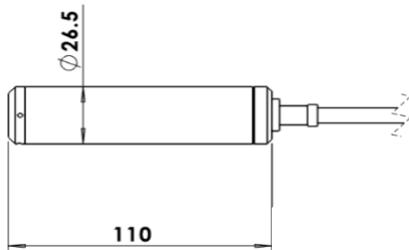


M: miniature size with 15.8mm sensor head diameter




Enclosure options

C: cylindrical with standard size

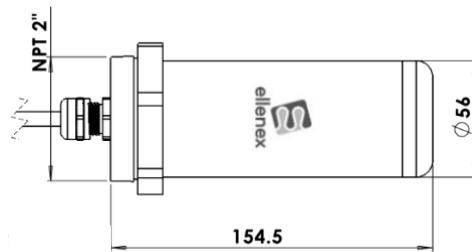

N: narrow cylindrical with less than 2inch diameter

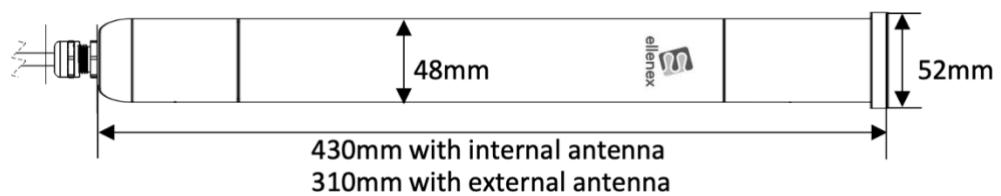

INDUSTRIES



Water & Wastewater



Marine & Oceanography



Agriculture & Farming



Mining & Construction



Oil & Gas



Food & Beverage

APPLICATION

- Ground Water Level Monitoring for Narrow Wells

ORDERING CODE

PLM2-N Spec-sheet



PLM2-N

Communication Type															
B: NB-IoT				C: Cat-M1											
Measurement Range															
1, 3, 5, 10, 20, 50, 100, 200m H ₂ O (or any other non-standard range)															
Cable Length		S: approximately same as measurement range													
		Others													
Sensor Head															
		S: standard size (27mm diameter)													
		M: miniature size (15.8mm diameter)													
Enclosure															
		C: Cylindrical Standard													
		N: Cylindrical Narrow													
		E: Rectangular													
Device Activation															
		S: on/off switch (only for C and E type enclosure)													
		X: No switch (always on)													
Antenna															
		I: Internal													
		E: External													
Options															
		(On request) ¹													
PLM2-N	B	10m	S	M	N	X	I								

Sample Product Code:

- PLM2-N-B-10m-S-S-N-S-I

NB IoT level sensor with Narrow Head, measurement range of 10m H₂O, with 10m Polyurethane cable and narrow cylindrical enclosure, without on-off switch and operated with internal antenna.

¹⁾ Product Options:

- EP: sensor with external power supply connector for 12V supply (only for E type enclosure, adaptor is not included)
- EPB: connector for 12V supply with internal battery backup (only for E type enclosure)
- HG: high-gain external antenna
- HCB: high-capacity battery (only for E and N type enclosure)