



LoRaWAN Operated Low Power Level Transmitter With Narrow Sensor Head for Liquid Media

- Compatible with all LoRaWAN frequencies
- Wide range of industrial applications
- High accuracy
- Designed to meet outdoor applications
- Long-term durable performance in harsh environment
- Ultra-low power
- Suitable for liquids compatible with SS



TECHNICAL SPECIFICATION

Sensor

• Range	1, 2, 3, 5, 10 (or other ranges up to 200)	m H2O
• Accuracy (combined linearity, hysteresis, repeatability)	±0.25 (typ.)	%Span
• Resolution	±0.01	%Span
• Pressure Reference	Vented Gauge	
• Temperature Coefficient of Zero	≤±0.03	%FS/°C
• Temperature Coefficient of Span	≤±0.03	%FS/°C
• Long Term Stability (1 year)	≤ 0.2	%Span
• Overload Protection	150	%FS
• Load Cycles (Zero to Full Scale)	10+	Million
• Storage / Operation Temperature	-20 ~ +85	°C
• Compensated Temperature	0 ~ +60	°C

Power

• Power Supply	Built-in Replaceable Lithium Battery, External Power (option)	
• Rated Voltage	3.6	V
• Battery Lifetime	100,000+ readings and 20,000+ transmission (More than 10 years for most applications)	

Physical

• Materials	O-ring: Viton, Body: SS304, Diaphragm: SS316, Oil: Silicon / Olive, Enclosure: ASA/POM
• Process Connection	No Process Connection (or on request)
• Weight	~1200 (for 5m range)
• Protection Rate	IP66, UV Protected enclosure and IP68 sensor head

Communication

• LoRaWAN® Version, Class	1.0.2revB, Class A (Class C on request)
• LoRaWAN® Frequency Zone	AS923, EU868, US902-928, AU915-928 (other zones available on request)
• LoRaWAN® Activation Type	OTA (default), ABP
• Sampling Type	Periodic (default), Event triggered
• Sampling Period	Configurable via downlink (default 4 hours)

• Transmission Type	Per sample (default), Event triggered, Conditional
• Parameter Configuration	Over-the-air via LoRaWAN® downlinks Locally via wireless connectivity
• Firmware Update	Locally via Wireless Connectivity, Over The Air

NETWORK CONNECTION AND VISUALISATION

Network Integration

- Integratable to all main networks (Actility, Alibaba, Cisco, Digita, Everynet, Helium, Kerlink, kpn, Loriot, machine-Q, Objenious, Orange, Orbiwise, Proximus, Senet, Sens, Swisscom, TATA, The Things Network (TTN), TTI and any other network)

Visualisation And Data Management

- Ellenex white label microservice platform, and Integratable to all main IIoT platforms directly or through the api (AWS, Azure, PTC ThingWorx, Bosch IoT, Cisco Jasper & Kinetic, Sierra Numerex, MathWorks, ThingSpeak, GE Digital Predix, LandisGyr, Siemens MindSphere, Cumulocity, myDevices, Ubidots, TagoIO, ALSO AllThingsTalk, HPE IoT and any other major IoT platform).

Ellenex Platform Main Features

- Encrypted ultra-low power communication protocol
- Advanced device inventory
- Integration APIs for enterprise systems
- Multi-tenant role-based access control
- Data export and import
- White-label platform for enterprise runs on private account
- Variable alarm setting for high and low thresholds and multi-channel alerting
- Sampling and transmission interval configuration
- Transmission condition configuration
- Other configurations and customisation available on request



Encrypted & ultra-low power



Integratable



Dynamic alerting



Multi-tenant



Scalable




Composable & API first

MODEL GUIDE

Model Options

Sensor head options

S: standard size

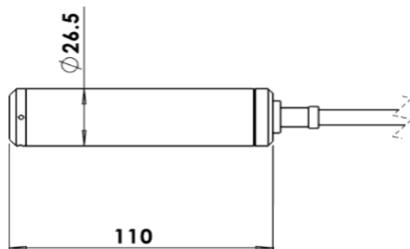


M: miniature size with 15.8mm sensor head diameter




Enclosure options

C: cylindrical with standard size

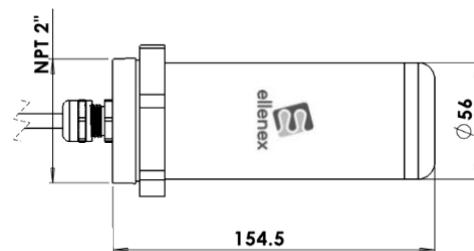

N: narrow cylindrical with less than 2inch diameter

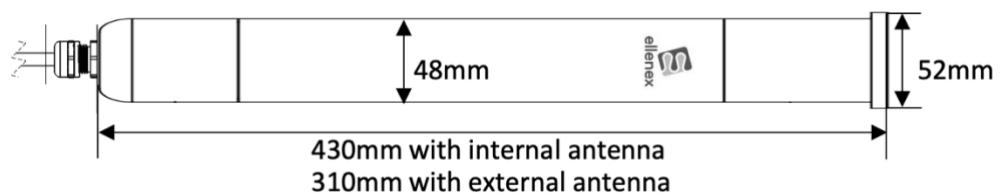

INDUSTRIES



Water & Wastewater



Marine & Oceanography



Agriculture & Farming



Mining & Construction



Oil & Gas



Food & Beverage

APPLICATIONS

- Ground Water Level Monitoring for Narrow Wells

PLM2-L Spec-sheet



ORDERING CODE

PLM2-L

	LoRaWAN Frequency Zone																																
	AS (AS923)	AUx (AU915-928) (Sub Band x)	EU (EU868)	USx (US902-928) (Sub Band x)																													
	LoRaWAN Activation																																
	A (Over The Air Activation - OTAA) P (Activation By Personalization - ABP)																																
Measurement Range																																	
1, 2, 3, 5, 10, 20, 50, 100, 200m H ₂ O (or any other non-standard range)																																	
Cable Material																																	
U: Polyurethane Other options available on request																																	
Cable Length																																	
S: Same as measurement length Other options available on request																																	
S: standard size (27mm diameter) M: miniature size (15.8mm diameter)																																	
Enclosure																																	
C: Cylindrical Standard N: Cylindrical Narrow E: Rectangular																																	
Device Activation																																	
S: With On/Off Switch (Only for C and E types) X: No Switch (Always On)																																	
Antenna Option																																	
E: External I: Internal																																	
Options																																	
(On request) ¹																																	
PLM2-L	AS	A	50m	U	S	M	N	X		E																							

Sample Product Code:

- PLM2-L-AS-A-50m-U-S-M-C-S-E

LoRaWAN® level sensor with narrow head, frequency of AS923, Over The Air Activated, measurement range of 50m H₂O, with Polyurethane cable and cylindrical narrow enclosure, without on-off switch and external antenna.

¹ Product Options:

- EP: sensor with external power supply connector for 12V supply (only for E type enclosure, adaptor is not included)
- EPB: connector for 12V supply with internal battery backup (only for E type enclosure)
- HG: high-gain external antenna
- HCB: high-capacity battery (only for N and E type enclosure)

All details are subject to change without prior notice
 © All Rights Reserved for Ellenex

Ver. 6.9-05/25