

Efficient Water Trough Level Monitoring

Efficient water trough level monitoring is vital for the health and wellbeing of livestock, ultimately leading to increased productivity and sustainability in agricultural operations.

CHALLENGE

Inefficient water trough level monitoring can lead to water waste, overflows, dry troughs, and livestock dehydration. Traditional monitoring methods require manual checks or expensive, complex installations. As a result, farmers and livestock owners struggle to maintain optimal water levels in their troughs, ensuring livestock health and reducing water waste.

SOLUTION

The Ellenex battery-operated Submersible Level Sensor (SLS) offers a robust and efficient solution to the challenge of water trough level monitoring. Utilizing Narrowband IoT (NB-IoT) technology, the SLS sends near real-time water level updates to a central dashboard, enabling farmers to monitor and manage water troughs remotely.

The benefits of this approach include:

- **Increased efficiency:** Near real-time updates enable timely water replenishment, reducing the risk of livestock dehydration.
- **Reduced labor costs:** Remote monitoring eliminates the need for manual inspections, saving time and resources.


LM-TR-W-N

Efficient Water Trough Level Monitoring



- Enhanced data accuracy: Ellenex's submersible level sensors provide precise water level measurements, ensuring better decision-making.
- Improved sustainability: Efficient water management helps reduce waste and promotes responsible resource usage.
- Rugged and reliable: Designed for harsh industrial applications, Ellenex sensors are built to withstand the elements and are IP65 rated.

By implementing the Ellenex Submersible Level Sensor, farmers can overcome the challenge of efficient water trough level monitoring, ensuring the wellbeing of livestock and improving overall agricultural operations.



Battery Operated



Ruggedised Design



Easy Install



Pre-Configured



Secure



Quick ROI

TECHNOLOGY

Ellenex employs cutting-edge communication technology by utilizing the LTE Cat M1 protocol, which operates on 4G and 5G cellular networks, making it suitable for mobile and stationary monitoring applications. However, its remarkably low power consumption and superior penetration rate, specifically designed for industrial solutions, sets it apart. Narrowband Internet of Things (NB-IoT) and LTE Cat M1 are advanced communication technologies that offer significant advantages for monitoring applications. These technologies provide efficient and reliable connectivity for IoT devices, allowing for seamless communication between our sensor and remote monitoring systems. NB-IoT and LTE Cat M1 are known for their low power consumption, enabling prolonged battery life for the devices, which is crucial for remote or hard-to-reach areas. Moreover, these technologies offer excellent penetration capabilities, allowing for reliable



LM-TR-W-N

Efficient Water Trough Level Monitoring



communication even in challenging environments, such as underground or remote locations where devices are often deployed. NB-IoT and LTE Cat M1 also provide secure and scalable connectivity, enabling robust and cost-effective solutions for monitoring applications in various industrial sectors, including agriculture, utilities, logistics, and more.

SENSOR TECHNICAL SPECIFICATIONS

• Range	1m (or other ranges upto 200m)	m
• Accuracy (combined linearity, hysteresis, repeatability)	±0.25 (typ.)	%Span
• Resolution	±0.01	%Span
• Temperature Coefficient of Zero	≤±0.03	%FS/°C
• Temperature Coefficient of Span	≤±0.03	%FS/°C
• Long Term Stability (1 year)	≤ 0.2	%Span
• Overload Protection	150	%FS
• Load Cycles (Zero to Full Scale)	10+	Million
• Storage / Operation Temperature	-20 ~ +85	°C
• Compensated Temperature	0 ~ +60	°C
• Power Supply	Built-in Replaceable Lithium Battery	
• Rated Voltage	3.6	V
• Battery Lifetime	10,000+ transmissions	
• Sensor Materials	O-ring: Viton, Body: SS316L, Diaphragm: SS316L, Oil: Silicon, Enclosure: POM	
• Weight	~1200 (for 5m range)	g
• Protection Rate	IP66, UV Protected enclosure and IP68 sensor head	
• SIM Card Type	4FF Nano-SIM, from any Network Provider	
• Firmware Update	Over The Air, Locally via Wireless Connectivity	
• Sampling Period	Configurable via downlink (default 4 hours)	
• Communication Bands	B1/B2/B3/B4/B5/B8/B12/B13/B18/B19/B20/B26/B28 and B39	
• Antenna	Internal (Default)/ External (customised options available)	

LM-TR-W-N

Efficient Water Trough Level Monitoring



PLATFORM FEATURES

Ellenex's software platform is a comprehensive and user-friendly solution specifically designed for diesel delivery management. The platform offers a wide range of features tailored for diesel delivery operations, including real-time data visualization, customizable alerts and notifications, historical data analysis, and predictive analytics. It provides users with a holistic view of their diesel delivery assets, allowing them to make data-driven decisions for optimal fuel management. The platform is accessible via web browsers and mobile devices, providing convenient remote access to critical information anytime, anywhere. Ellenex's software platform is designed with a user-centric approach, offering intuitive navigation and a user-friendly interface for easy setup and configuration. With its advanced features and ease of use, Ellenex's software platform empowers users to effectively monitor and manage their diesel delivery operations in remote areas, ensuring efficient and sustainable fuel resource management.

- Encrypted ultra-low power communication protocol
- Advanced device inventory
- Integration APIs for enterprise systems
- Multi-tenant role-based access control
- Data export and import
- White-label platform for enterprise runs on private account
- Variable alarm setting for high and low thresholds and multi-channel alerting
- Sampling and transmission interval configuration
- Transmission condition configuration
- Other configurations and customisation available on request



Encrypted & ultra-low power



Integratable



Dynamic alerting



Multi-tenant



Scalable



Composable & API first



Low cost




Action management




Resource monitoring

LM-TR-W-N


Efficient Water Trough Level Monitoring

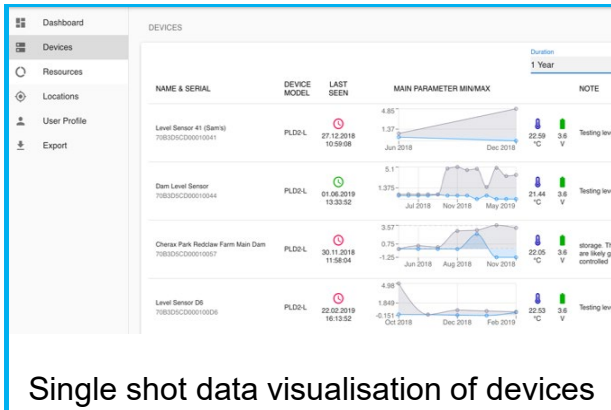


Single shot data visualisation of devices

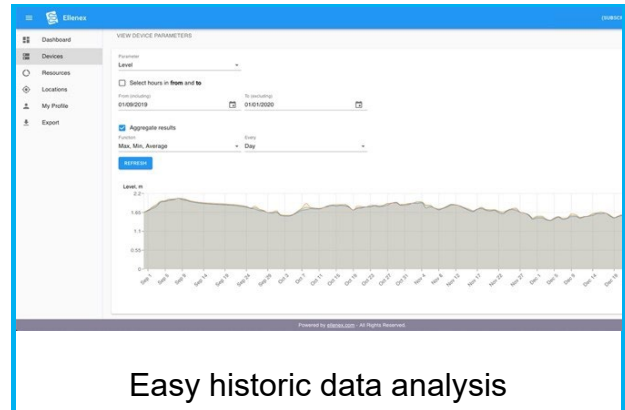


Easy historic data analysis

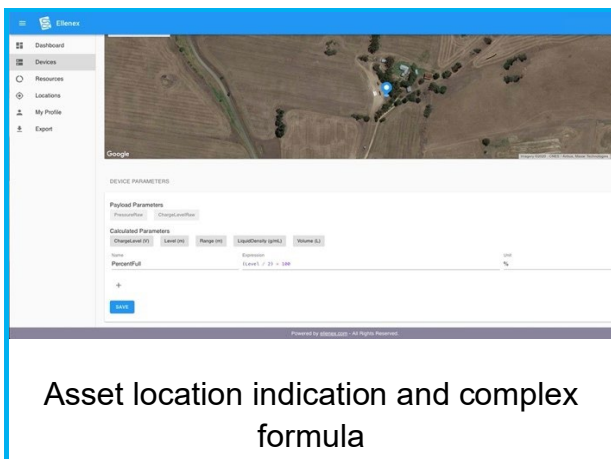


Asset location indication and complex formula

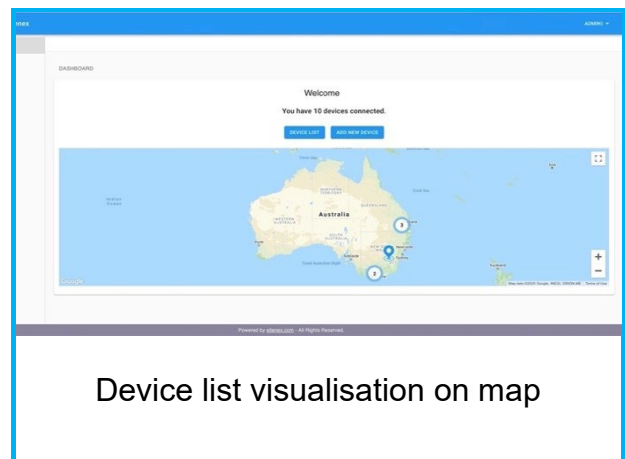

Device list visualisation on map

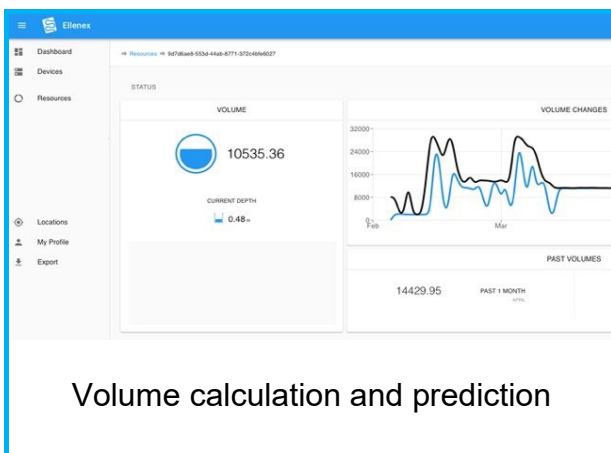

Volume calculation and prediction

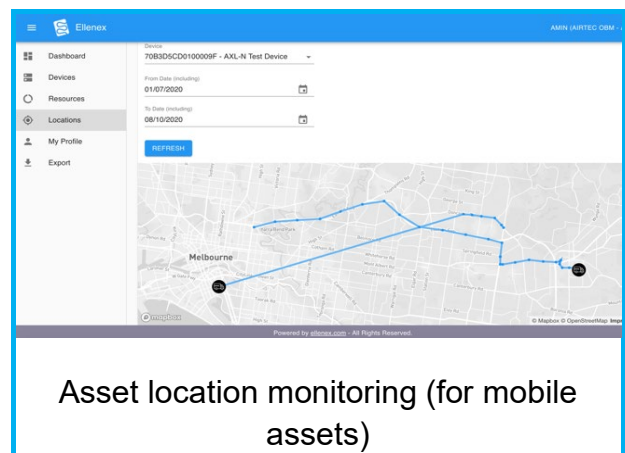

Asset location monitoring (for mobile assets)

LM-TR-W-N

Efficient Water Trough Level Monitoring



INDUSTRIES SERVED



Agriculture &
Farming

INTEGRATION OPTIONS

Ellenex's solution sets itself apart with its pre-configured and plug-and-play design, eliminating the complexities of configuration, programming, and connection to the platform. This unique approach ensures that users can start monitoring their diesel tanks quickly and easily without any technical hassles. Additionally, Ellenex offers seamless integratability at both the network and platform levels, allowing for easy integration with any network or visualization/analysis platform. This competitive advantage makes Ellenex's solution highly adaptable and compatible with existing systems, providing users with flexibility and convenience in managing their diesel resources effectively.

ORDERING PROCESS

Ellenex offers simple and easy way to order the solution from any location on earth with narrow band cellular coverage. Please visit our sales portal (www.ellenex.shop) or contact us to discuss your application. This is the first step to experience a reliable IoT solution at scale.

LM-TR-W-N

Efficient Water Trough Level Monitoring



Purchase the solution online



Learn more about our Software Platform



View the Included Sensor Datasheet



Browse our other solutions

All details are subject to change without prior notice
© All Rights Reserved for Ellenex

Ver. 1.3-05/23

Integrated IoT Solutions



Email: sales@ellenex.com
Web: www.ellenex.com
Platform: ellenex.net
Sales Portal: www.ellenex.shop